



The bridge to possible

Data sheet
Cisco public

Cisco 100GBASE CXP Modules

<https://www.jhj.cn>

Contents

Product overview	3
Features and benefits	3
Cisco CXP 100GBASE-SR10 module	4
Technical specifications	4
Dimensions	5
Environmental conditions and power requirements	5
Warranty	5
Ordering information	5
Regulatory and standards compliance	6
Cisco environmental sustainability	6
Cisco Capital	6
Additional information	7

<https://www.jhj.cn>

Product overview

The Cisco® CXP 100GBASE modules offer customers a wide variety of high-density 100Gbps connectivity solutions for short-reach data center networking, high-performance computing networks, enterprise core aggregation, and service provider transport applications.

Features and benefits

Primary features of Cisco CXP 100GBASE modules include:

- Support for 100 Gigabit Ethernet
- Hot-swappable input/output device that plugs into a Cisco CXP-module-based switch, router, or optical platform port
- Flexibility of interface choice
- Support for a "pay-as-you-grow" model
- Support for Digital Optical Monitoring (DOM)
- CXP-100G-SR10 and CXP-100G-SR12 are both interoperable with any IEEE-compliant 100GBASE-SR10 form factors
- Support for the Cisco quality identification (ID) feature, which enables a Cisco platform to identify whether the module is certified and tested by Cisco
- Easy-to-use pull-release handle that is color coded for reach identification
- Capable of supporting 120Gb/s by utilizing all 12 optical lanes for high-density interconnect applications
- CXP-100G-SR10 supports breakout applications; each lane complies with 10GBASE-SR requirements and OTN rates up to 11.25Gb/s
- CXP-100G-SR10 and CXP-100G-SR12 both support breakout applications for 40GBASE-SR4
- Operating distance of maximum 100 meters over OM3 fibers or maximum 150 meters over OM4 fibers
- Power consumption of maximum 3.5W
- Operating case temperature of 0°C to 70°C
- MPO-24 optical receptacle

Cisco CXP 100GBASE-SR10 module

The Cisco CXP 100GBASE-SR10 module (Figure 1) supports link lengths of 100m and 150m on laser-optimized OM3 and OM4 multifiber cables, respectively. The module delivers high-bandwidth 100-gigabit links over 24-fiber ribbon cables terminated with MPO/MTP-24 optical connectors. It can also be used in 10 x 10-Gb mode along with ribbon-to-duplex-fiber breakout cables for connectivity to ten 10GBASE-SR optical interfaces.

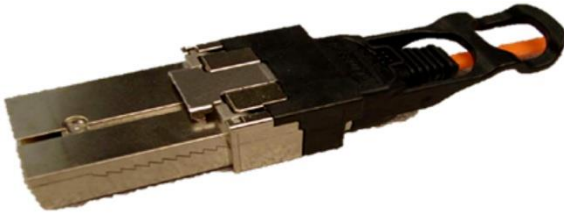


Figure 1.
Cisco CXP 100GBASE-SR10 Module

Technical specifications

Platform Support

Cisco CXP modules are supported on Cisco switches and routers. For more details, refer to [Cisco 100 Gigabit Ethernet Transceiver Modules Compatibility Matrix](#).

Connectors and cabling

- 24-fiber MPO/MTP connector (CXP-100GBASE-SR10 and CXP-100G-SR12 modules receive a female MPO/MTP-24 connector)

Note: Only connections with patch cords with PC or UPC connectors are supported. Patch cords with APC connectors are not supported. All cables and cable assemblies used must be compliant with the standards specified in the Regulatory and Standards Compliance section, later in this document.

Table 1 provides cabling specifications for the Cisco CXP modules.

Table 1. CXP Port cabling specifications

Cisco CXP Module	Wavelength (nm)	Cable Type	Core Size (Microns)	Modal Bandwidth (MHz*km) ^{***}	Cable Distance [*]
CXP-100G-SR10	850	MMF	50.0	2000 (OM3)	100m
			50.0	4700 (OM4)	150m ^{**}
CXP-100G-SR12	850	MMF	50.0	2000 (OM3)	100m
			50.0	4700 (OM4)	150m ^{**}

^{*} Minimum cabling distance for -LR4 modules is 2m, according to the IEEE 802.3ba.

^{**} Considered an engineered link with maximum 1dB allocated to connectors and splice loss.

^{***} Specified at transmission wavelength.

Table 2 shows the primary optical characteristics for the Cisco CXP 100GBASE modules.

Table 2. Optical transmit and receive specifications

Module	Type	Transmit Power (dBm)*		Receive Power (dBm)*		Transmit and Receive Center Wavelength Range (nm)
		Maximum	Minimum	Maximum	Minimum	
CXP-100G-SR10	100GBASE-SR10 10GBASE-SR	-1.0 per lane	-7.6 per lane	2.4 per lane	-9.5 per lane	12 lanes: 840 to 860 nm
CXP-100G-SR12	100GBASE-SR10	2.5 per lane	-7.6 per lane	2.4 per lane	-9.5 per lane	12 lanes: 840 to 860 nm

* Transmitter and receiver power are in averages, unless specified.

Dimensions

Maximum outer dimensions for the CXP modules are (H x W x D) 13.3 x 24 x 62 mm (0.52 x 0.94 x 2.44 in).

The Cisco CXP modules typically weigh less than 200 grams (7 oz.).

Environmental conditions and power requirements

- Storage temperature range: -40 to 85°C (-40 to 185°F)
- CXP operating temperature range: 0 to 70°C (32 to 158°F)
- CXP power consumption at 70°C: <3.5W maximum

Warranty

- Standard warranty: 90 days
- Expedited replacement available via a Cisco SMARTnet® Service support contract

Ordering information

Table 3 provides ordering information for Cisco CXP modules and related cables.

Table 3. Ordering information

Description	Product Number
100GBASE-SR10 CXP Module for MMF compliant to 10GBASE-SR	CXP-100G-SR10
100GBASE-SR10 CXP Module for MMF	CXP-100G-SR12

Regulatory and standards compliance

Standards:

- GR-20-CORE: Generic Requirements for Optical Fiber and Optical Fiber Cable
- GR-326-CORE: Generic Requirements for Single-Mode Optical Connectors and Jumper Assemblies
- GR-1435-CORE: Generic Requirements for Multifiber Optical Connectors
- IEEE 802.3ba (LR4, SR10)
- Reduction of Hazardous Substances (RoHS) 6 compliant

Safety:

- Laser Class 1 21CFR-1040 LN50 7/2001
- Laser Class 1 IEC60825-1

Cisco environmental sustainability

Information about Cisco's environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the "Environment Sustainability" section of Cisco's [Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the "Environment Sustainability" section of the CSR Report) are provided in the following table:

Sustainability topic	Reference
Information on product material content laws and regulations	Materials
Information on electronic waste laws and regulations, including products, batteries, and packaging	WEEE compliance

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).

Additional information

For more information about Cisco CXP 100GBASE optics and copper modules, contact your sales representative or visit <https://www.cisco.com/go/dcnm>.

<https://www.jhj.cn>

Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)